

پارس فانال P&F PARS FANAL

محافظ ولتاژ - جریان تکفاز PFAVP

● حفاظت در برابر نوسانات ولتاژ

● حفاظت اضافه بار

● قابلیت تنظیم آمپر نامی از (۱-۴۰) و (۱-۶۳) آمپر

● قابلیت کالیبراسیون جریان از $10A \sim -10$

● حالت صرفه جویی انرژی

● قابلیت نصب در جعبه فیوزهای خانگی بعنوان محافظ ولتاژ مرکزی

● قابل استفاده در ماشین آلات صنعتی، کشاورزی، تابلوهای برق تکفاز، موتورهای

تکفاز، ماینر و ...

● حفاظت در برابر دو فاز شدن

● قابلیت تنظیم زمان تاخیر در وصل

● قابلیت کالیبراسیون ولتاژ از $10V \sim -10$

● قابلیت کالیبراسیون فرکانس $2/5\% \sim +2/5\%$

● قابلیت وصل مجدد هنگام خطای اضافه جریان بین ۰ الی ۲۰ مرتبه

● قابل استفاده به عنوان محافظ کولر گازی، یخچال، لباسشوی و ...

نحوه تنظیمات

با فشردن دکمه SET میتوان پارامتر مورد نظر را یافته و توسط دکمه های بالا و پایین

مقدار پارامتر را کم و زیاد نمود.

نکته: زمانی که ولتاژ تغذیه DC باشد، جریان نمایش داده نمی شود و تنها ولتاژ نمایش

داده می شود.

Technical data


Supply terminals	N, L
Rated supply voltage	AC 220V; DC 85-300V
Rated frequency	40/50/60/170Hz
>U setting range	AC 130-300V; DC 130-300V
<U setting range	AC 80-210V; DC 85-210V
Voltage hysteresis	5V
Overvoltage trip delay	0.5s
Voltage accuracy	<1%
Max. operating phase voltage	350V _{Max}
Operating current	40A/63A
Altitude	<2000m
Function	Lightning protection
Permissible relative humidity	<50% at 40°C (without condensation)
Ambient temperature	-25°C ~ +55°C
Net weight	159g
Size	81*36*66mm

Front-face panel

>V: Overvoltage Indicator
 <V: Underage Voltage
 >A: Overcurrent Indicator
 POWER: Normal Working Indicator

M Menu selection
 ▲ Digit+
 ▼ Digit-
 ⏻ ON/OFF

Wiring diagram/Dimensional Drawing

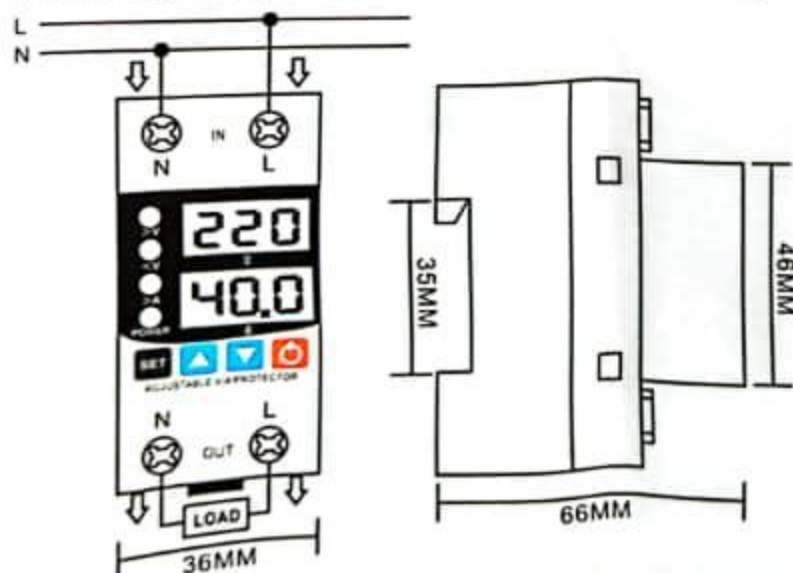

Setup menu

